



8 inch Color Chartplotter Display and Fishfinder

Model: HGP-800D(F)MKII Series



Windows OS

Real time recording

Background Satellite Image

Various AIS INFO Display



High Speed CPU

High speed CPU(667MHz) is built-in.
High speed zoom-in/out, high speed moving cursor,
real time recording, multi-media(music, movie, etc),
various harbor information available.



Active Antenna(Optional)

The active antenna is connected to NMEA input port.



USB/SD support

USB printer, SD card/USB memory available
to store user data(WPT, mark, track, etc)
or upgrade new S/W and chart.



Three Chart Systems

Three chart systems C-MAP(SD)/HY Chart(Inter/Exter)
are available. The most suitable chart is selected by the
user. Lots of information such as buoys, lighthouses,
wrecks and tides are provided.



Windows OS

Easy operation with Turbo keys on Windows.



Entertainment

Picture, music, movie, game support for
more joyful navigation and fishing.



Fishfinder(HGP-800DF)

- High analysis of the underwater
- Dual frequency (50/200KHz)
- Fully automatic (gain, range, etc)
- Alarms & A-scope
- Water temperature displaying
- Full screen(8 inch) supports



Information

Images of Harbor, signs, facilities, web-pages.



Various AIS information

When connecting AIS, sorting MMSI, Ship's name,
nationality, CPA, etc available. Additionally, easy measuring
the distance of other ships available with AIS radius.



103-903 Bucheon Technopark 364 Samjeongdong Ojeonggu

Bucheon Gyeonggi, Korea

TEL : +82 32 327 4712

FAX : +82 32 327 4713

Web-site : <http://www.haiyang.co.kr>

The HGP-800D MKII and the HGP-800FD MKII are different models.


GENERAL SPECIFICATION

1. Operating systems Microsoft Windows
2. Display Screen
8 inch VGA color TFT LCD
3. Power Supply
DC 12V~36V($\pm 10\%$), 12W(MX-80)/18W(MX-80F)
4. Operating Temperature
Display Unit $-15^{\circ}\text{C}\sim+50^{\circ}\text{C}$
Antenna Unit $-25^{\circ}\text{C}\sim+70^{\circ}\text{C}$
5. Performance Standard
IMO Resolution MSC.112(73)
6. Option
Entertainment Media Player, AIS
Wire/Wireless Remote Controller, SD,
USB memory, USB printer(HP only)
CCTV Camera, Video-in (TV, VTR, DVD, etc)
Monitor(Remote display)

CHARTPLOTTER SPECIFICATION

1. Display Method Mercado Projection
2. Display Mode
True motion / North up / Course up / Head up
3. Latitude Limits Between 85° N to 85° S
4. Map Scale 0.05nm to 1,500nm
5. Map Datum WGS-84
6. WPT/MARK 20,000 points
7. Track Point 50,000 points
8. Route 100 Routes
9. Draw Point 1,000 points
10. Area Name 1,000 points
11. Chart Data HY-Chart/C-MAP MAX
External chart(SD)
12. Output Data NMEA-0183
13. Input Data NMEA-0183
14. Alarm
Arrival, Anchor, Off course,
Interval timer AIS, Depth,
Fish-school, Water temperature


Display Unit

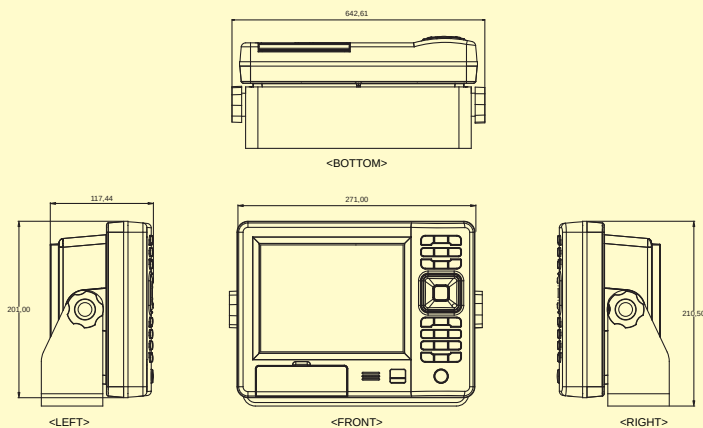

ECHO SOUNDER SPECIFICATION (HGP-800DF)

1. Display Mode
Normal (single/dual-frequency), Bottom-lock,
Bottom-zoom, A-scope
2. Frequency
50 and 200 KHz (single or dual)
3. Output Power
600W (standard) / 1.2KW (option)
4. Depth Range speed
2.5m ~ 1,200m
5. Image speed
Fixed 8 speeds (4/1, 2/1, 1/1, 1/2, 1/4, 1/8, 1/16, 1/32)
and stop
6. Interference rejection
3 levels
7. Noise rejection
4 levels
8. Function
Gain(auto/manual), range(auto/manual),
depth with shift(auto/manual),
pulse length selection, white/black line,
water temperature

Interconnection Diagram

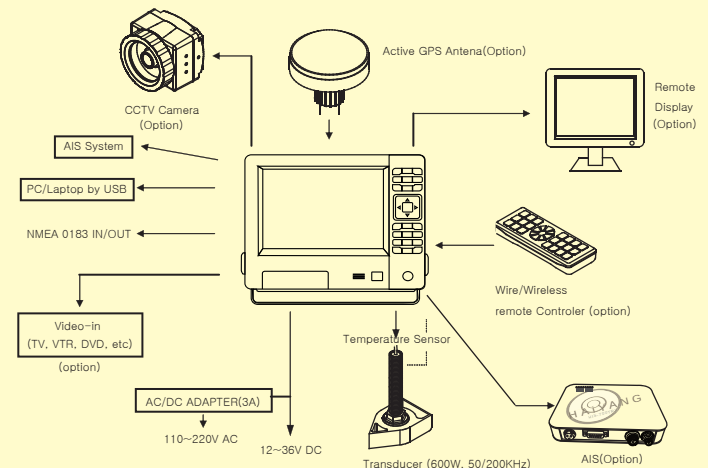

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Certified to ISO 9001/2000

04723H Printed in Korea

Haiyang OLIX CO., LTD.
103-903 Bucheon Technopark 364 Samjeongdong Ojeonggu
Bucheon Gyeonggi, Korea
Tel : +82 2 3274712 Fax: +82 32 3274713
Web-site: <http://www.haiyang.co.kr>
E-mail: sales@haiyang.co.kr